

High Power 980nm SM Tap+Isolator Hybrid

980nm High Power SM Tap+Isolator Hybrid is a fiber passive component which integrated with the function of Tap Filter Coupler and Optical Isolator, Tap Coupler can separate the signal power for monitoring, Optical Isolator for avoiding the backward reflection light, It's widely used in EDFA and Fiber Amplifier application, if need pulse type please contact us to confirm.

Application:

Fiber Laser
EDFA
Raman Amplifier
Lab And Research

Features:

Compact Package
High Isolation
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	980	nm
Bandwidth	BW	± 5	nm
Typ. Peak Isolation	Iso	32	dB
Min. Isolation	Iso	25	dB
Max. Excess Loss	EL	1.2	dB
Max. Polarization Dependent Loss	PDL	0.15	dB
Tap Ratio		1 $\pm$ 0.2, 2 $\pm$ 0.4, 5 $\pm$ 1, 10 $\pm$ 2	%
Min. Return Loss	RL	50	dB
Min. Directivity		55	dB
Max. Optical Power (CW)	P	0.5, 1, 3, 5, 10, 20 or customized	W
Max. Peak Power (Pulse)	P	5, 10, 20 or customized	kW
Max. Tensile Load		5	N
Fiber Type		HI 780 fiber on all port	-
Operating Temperature	T	0~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension			mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. Connectors only 1W CW guarantee.

Drawing:

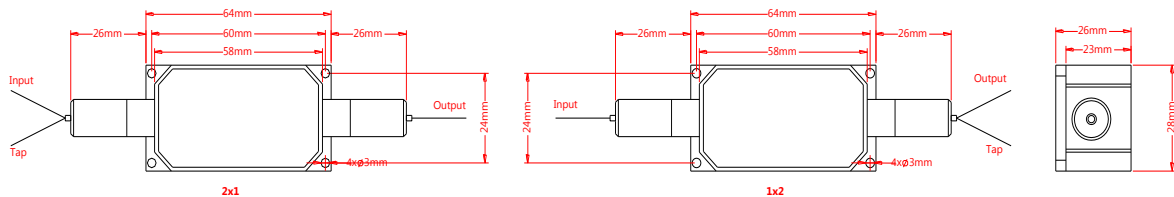

Ordering Information (Part Number):

HSM TI- WWW - CC - TT - HH - J - LL - CC						
WWW	CC	TT	HH	J	LL	CC
Wavelength	Configuration	Tap Ratio	Handling Power	Fiber Jacket	Fiber Length	Connector
800 - 800nm	21 - 2x1	01 - 1%	Z5 - 0.5W	B - 250um Bare Fiber	05 - 0.5m	NE - None
808 - 808nm	12 - 1x2	02 - 2%	01 - 1W	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
810 - 810nm		03 - 3%	03 - 3W		15 - 1.5m	FU - FC/UPC
820 - 820nm		05 - 5%	05 - 5W		20 - 2.0m	SA - SC/APC
830 - 830nm		10 - 10%	10 - 10W		SS - Specify	SU - SU/APC
850 - 850nm		SS - Specify	20 - 20W			LA - LC/APC
SSS - Specify			SS - Specify			LU - LC/UPC
						SS - Specify