

1280nm In Line Polarizer

1280nm In Line Polarizer is a fiber optic passive component which can be used for converting the non polarized light to a polarized light, it only allows the polarization light that paralleled to the polarizer to pass and block the other polarization, it also can be used to enhance extinction ratio of the polarization light. High power type is also available upon request.

Application:

Fiber Optic Amplifier
Fiber Optic Sensor
Fiber Laser
Lab And Research

Features:

High Extinction Ratio
High Power Available
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1280	nm
Bandwidth	BW	± 10	nm
Typ. Insertion Loss	IL	0.9	dB
Max. Insertion Loss	IL	1.2	dB
Typ. Extinction Ratio	ER	25	dB
Min. Extinction Ratio	ER	23	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	500	mW
Max. Tensile Load		5	N
Fiber Type		PM Panda fiber or SMF-28e fiber	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		$\Phi 5.5 \times L35$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, ER will be 2dB lower, slow axis is default aligned to the connector key.

Drawing:

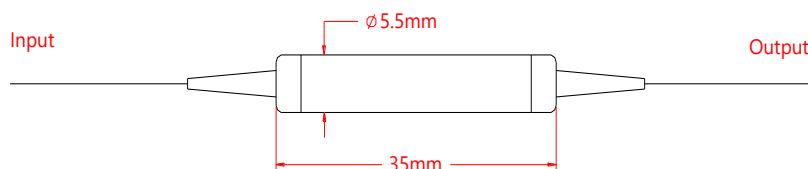

Ordering Information (Part Number):

ILP- WWW - FF - J - LL - CC				
WWW	FF	J	LL	CC
Wavelength	Fiber Type (Input/Output)	Fiber Jacket	Fiber Length	Connector
1280 - 1280nm SSSS - Specify	PP - PM fiber on input and output port SS - SM fiber on input and output port PS - PM fiber on input port SM fiber on output port SP - SM fiber on input port PM fiber on output port	B - 250um Bare Fiber 9 - 900um Loose Tube 2 - 2.0mm Loose Tube 3 - 3.0mm Loose Tube	05 - 0.5m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	NE - None FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify