

High Power 1064/1030nm 1x2 Filter WDM

High Power 1064/1030nm Wavelength Division Multiplexer is a fiber component built with thin-film filter technology, it can be used to separate or combine 1064nm and 1030nm wavelength signal, it's widely used in Fiber Laser Systems and Fiber Amplifier Systems, the handling power can be customized.

Application:

Fiber Laser
EDFA
Optical Diffraction System
Lab And Research

Features:

High Power
High Isolation
Low Insertion Loss
Optical Path Reversibility




Specification:

Parameter	Symbol	Value	Unit
Type		P1064 R1030	nm
Pass Band	λ	1064 $\pm$ 2.5	nm
Reflect Band	λ	1030 $\pm$ 10	nm
Max. Insertion Loss @Pass Channel	IL	0.8	dB
Max. Insertion Loss @Reflect Channel	IL	0.6	dB
Min. Isolation @Pass Channel	Iso	25	dB
Min. Isolation @Reflect Channel	Iso	13	dB
Max. Insertion Loss Temperature Sensitivity		0.5	dB
Max. Polarization Dependent Loss	PDL	0.1	dB
Max. Polarization Mode Dispersion	PMD	0.1	ps
Min. Directivity		55	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	1, 2, 3, 5 or specify	W
Max. Tensile Load		5	N
Fiber Type		HI 1060	-
Operating Temperature	T	-5~75	°C
Storage Temperature	T	-40~85	°C
Package Dimension		Φ5.5×L35	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 °C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. connectors only 1W CW optical power guarantee.

Drawing:

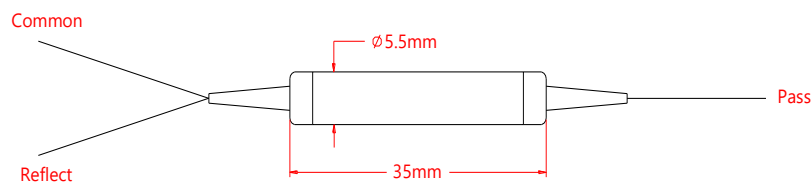

Ordering Information (Part Number):

HPFWDM- WWW/WWW - HH - D - J - LL - CC					
WWW/WWW	HH	D	J	LL	CC
Wavelength	Handling Power	Package Dimension	Fiber Jacket	Fiber Length	Connector
1064/1030 - 1064nm Pass, 1030nm Reflect	01 - 1W 02 - 2W 03 - 3W 05 - 5W SS - Specify	1 - Φ5.5×L35mm 2 - 90x20x10mm S - Specify	B - 250um Bare Fiber 9 - 900um Loose Tube 2 - 2.0mm Loose Tube 3 - 3.0mm Loose Tube	05 - 0.5m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	NE - None FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify