

2000nm (1+1)x1 Multimode Pump and PM Signal Combiner

2000nm (1+1)x1 Multimode Pump and PM Signal Combiner is a fiber passive componnet which can be used in coupling input pump laser and polarized signal seed laser with high coupling efficiency, it's widely used in fiber laser system and Fiber Amplifier System, the fiber can be customized upon request.

Application

Fiber Laser
Fiber Amplifier
Quantum Optics
Lab And Research

Features:

High Coupling Efficiency
High Power
RoHs Compliant
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Signal Operating Wavelength	λ	1900-2100	nm
Pump Operating Wavelength	λ	700-900	nm
Pump Input Fiber		105/125 0.15NA or 0.22NA, 200/220 0.22NA	-
Signal Input Fiber		PM 1950, 6/125, 10/125, 12/125, 15/125, 20/125, 25/250 PM SCF or DCF	-
Output Fiber		6/125, 10/125, 12/125, 15/125, 20/125, 20/200, 25/250, 30/250, 20/400 PM DCF	-
Max. Signal Insertion Loss		0.5	dB
Min. Extinction Ratio	ER	18	dB
Min. Pump Efficiency		90	%
Max. Optical Power Per Pump Input (CW)	P	25, 50, 100, 200 or specify	W
Min. Return Loss	RL	35	dB
Operating Humidity		5~95	%RH
Operating Temperature	T	-5~70	℃
Storage Temperature	T	-40~85	℃
Package Dimension		70x12x8	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23℃.

Pump and signal combiners are default without connector, bare fiber, if special request please contact us to confirm.

Drawing:

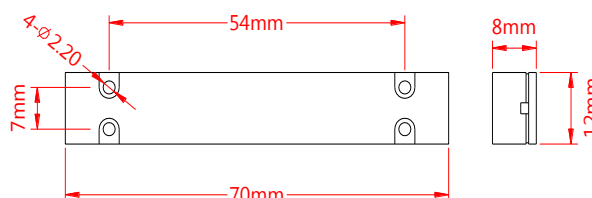

Ordering Information (Part Number):

PMPSC- WWW - CCC - T - HHH - FFF/FFF - FFF/FFF - FFF/FFF - LL							
WWW	CCC	T	HHH	FFF/FFF	FFF/FFF	FFF/FFF	LL
Signal Wavelength	Configuration	Pump Type	Handling Power (Per Pump Input)	Input Pump Fiber Type	Input Signal Fiber Type (PM)	Output DC Fiber Type (PM)	Fiber Length
2000 - 2000nm	111 - (1+1)x1	F - Forward B - Backward	05 - 5W 10 - 10W 25 - 25W 50 - 50W 100 - 100W 200 - 200W SS - Specify	105/125 - 105/125um 200/220 - 200/220um	PM19 - PM 1950 6/125 - 6/125um 10/125 - 10/125um 12/125 - 12/125um 15/125 - 15/125um 20/125 - 20/125um 20/200 - 20/200um 25/250 - 30/250um SS/SSS - Specify	6/125 - 6/125um 10/125 - 10/125um 12/125 - 12/125um 15/125 - 15/125um 20/125 - 20/125um 20/200 - 20/200um 25/250 - 25/250 30/250 - 30/250um 20/400 - 20/400um SS/SSS - Specify	05 - 0.5m 08 - 0.8m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify