

1030nm SM Fiber Patchcord

1030nm SM Fiber Patchcord is built with SM fiber, it's widely used in Fiber Communication, Fiber Optic Sensor, Optical Testing System, the termination connector can be FC, SC, LC, ST, the jacket diameter can be 0.9, 2.0, 3.0mm or armoured type.

Application:

Fiber Communication
Fiber Optic Sensor
Testing System
Lab And Research

Features:

Low Insertion Loss
High Return Loss
High Quality Ferrule
High Reliability




Optical Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1030	nm
Typ. Insertion Loss	IL	0.3	dB
Max. Insertion Loss	IL	0.5	dB
Min. Return Loss	RL	50 for UPC, 60 for APC	dB
Fiber Type		HI 1060 fiber	-
Tensile Load		5	N
Max. Optical Power	P	500	mW
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C

Notice: Above specifications are tested at center wavelength in room temperature @23°C.

Drawing:

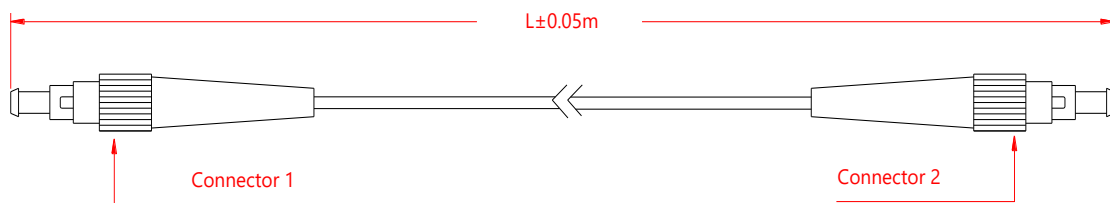

Ordering Information (Part Number):

SMFP- WWW - J - LL - CC - CC				
WWW	J	LL	CC	CC
Wavelength	Fiber Jacket	Fiber Length	Connector 1	Connector 2
1020 - 1020nm	B - Bare Fiber	05 - 0.5m	FA - FC/APC	NE - None
1030 - 1030nm	9 - 900um Loose Tube	10 - 1.0m	FU - FC/UPC	FA - FC/APC
1040 - 1040nm	2 - 2.0mm Loose Tube	15 - 1.5m	SA - SC/APC	FU - FC/UPC
1050 - 1050nm	3 - 3.0mm Loose Tube	20 - 2.0m	SU - SC/UPC	SA - SC/APC
1053 - 1053nm	A - Armoured Cable	30 - 3.0m	LA - LC/APC	SU - SC/UPC
1060 - 1060nm		SS - Specify	LU - LC/UPC	LA - LC/APC
1064 - 1064nm			SS - Specify	LU - LC/UPC
1080 - 1080nm				SS - Specify
SSSS - Specify				