

1030±50nm High Power Broadband Polarization Insensitive Optical Isolator

1030±50nm High Power Broadband Polarization Insensitive Optical Isolator is a fiber passive component built with TGG crystal, it allows light signal to be delivered in one forward direction and avoid the back reflection light, it's widely used in OCT system, fiber optic sensor system to protect the light source and lower down the system optical signal noise. The higher power type is available upon request.

Application:

OCT
Fiber Optic Sensor
Testing System
Lab & Research

Features:

Wide Band
High Isolation
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1030	nm
Bandwidth	BW	±50	nm
Typ. Insertion Loss @ ±50nm	IL	0.6	dB
Max. Insertion Loss @ ±50nm	IL	1.0	dB
Typ. Peak Isolation @ ±50nm	Iso	35	dB
Min. Isolation @ ±50nm	Iso	25	dB
Max. Polarization Dependent Loss	PDL	0.2	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	0.5, 1, 3, 5, 10, 20 or customized	W
Max. Peak Power	P	10, 20 or customized	KW
Max. Tensile Load		5	N
Fiber Type		HI 1060 fiber	-
Operating Temperature	T	10~50	°C
Storage Temperature	T	0~60	°C
Package Dimension		55x30x29	mm

Notice: Above specifications are tested without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. Connectors only 1W CW guarantee.

Drawing:

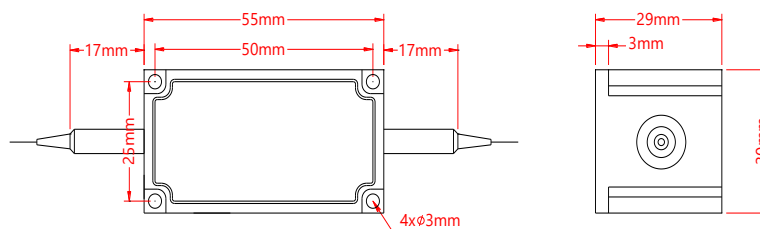

Ordering Information (Part Number):

HBPII-**WWW**-**HH**-**J**-**LL**-**CC**

WWW	HH	J	LL	CC
Wavelength	Handling Power	Fiber Jacket	Fiber Length	Connector
1030 - 1030nm	Z5 - 0.5W	B - 250um Bare Fiber	05 - 0.5m	NE - None
1040 - 1040nm	01 - 1W	9 - 900um Loose Tube	08 - 0.8m	FA - FC/APC
1050 - 1050nm	03 - 3W		10 - 1.0m	FU - FC/UPC
1060 - 1060nm	05 - 5W		15 - 1.5m	SS - Specify
SSSS - Specify	10 - 10W		20 - 2.0m	
	20 - 20W		SS - Specify	
	SS - Specify			