

1040nm 1x1 PM Mechanical Optical Switch


1040nm 1x1 PM Mechanical Optical Switch is an optoelectronic passive product which can switch or operate the light signal in the optical transmission line or integrated optical path. It's widely used in fiber communication, fiber optic sensor and optical testing systems, high power type is available upon request.

Application:

Fiber Communication
Fiber Optic Sensor
Testing System
Lab & Research

Features:

Low Insertion Loss
High Switching Speed
RoHs Compliant
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1040	nm
Bandwidth	BW	± 10	nm
Typ. Insertion Loss	IL	1.2	dB
Max. Insertion Loss	IL	1.5	dB
Min. Extinction Ratio	ER	18	dB
Max. Wavelength Dependent Loss	WDL	0.25	dB
Max. Temperature Dependent Loss	TDL	0.25	dB
Min. Return Loss	RL	50	dB
Min. Cross Talk		50	dB
Max. Repeatability		± 0.02	dB
Power Supply		3.0 or 5.0	V
Min. Life Time		10^7	Cycle
Max. Switching Time		8	ms
Max. Optical Power (CW)	P	500 or customized	mW
Max. Tensile Load		5	N
Fiber Type		PM 980 Panda fiber	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		L27xW12xH8.2	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.


For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, ER will be 2dB lower.

Drawing:

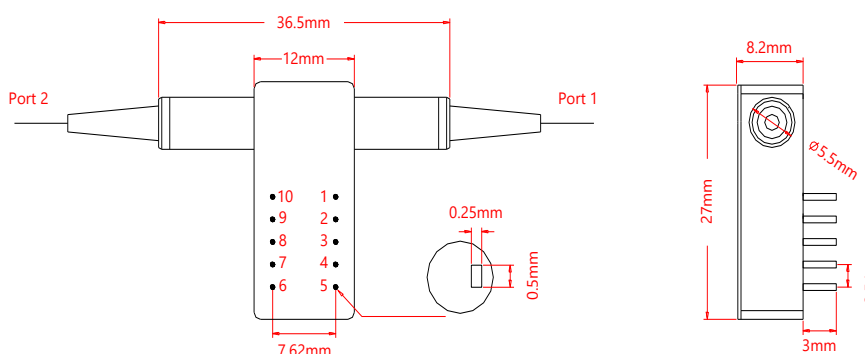

Pin Information:

Type for 1x1	Optical Path	Electric Drive				Status Sensor			
		Pin 1	Pin 5	Pin 6	Pin 10	Pin 2-3	Pin 3-4	Pin 7-8	Pin 8-9
Latching	Port 1 - Port 2	V+	GND	-	-	Open	Close	Close	Open
	Light Close	-	-	GND	V+	Close	Open	Open	Close
Non-latching	Port 1 - Port 2	V+	-	-	GND	Open	Close	Close	Open
	Light Close	-	-	-	-	Close	Open	Open	Close

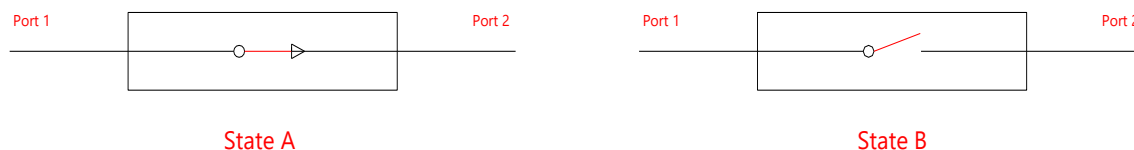Optical Path:**Electric:**

Type	Voltage	Current	Resistance
5V Latching	4.5~5.5V	36~44mA	125Ω
5V Non-latching	4.5~5.5V	26~32mA	175Ω
3V Latching	2.7~3.3V	54~66mA	50Ω
3V Non-latching	2.7~3.3V	39~47mA	70Ω

Ordering Information (Part Number):PMSW-**WWW-M-D-J-LL-CC**

WWW	CC	M	D	J	LL	CC
Wavelength	Configuration	Mode	Driving Voltage	Fiber Jacket	Fiber Length	Connector
1020 - 1020nm	11 - 1x1	L - Latching	3 - 3V	B - 250um Bare Fiber	05 - 0.5m	NE - None
1030 - 1030nm		N - Non-latching	5 - 5V	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1040 - 1040nm					15 - 1.5m	FU - FC/UPC
1050 - 1050nm					20 - 2.0m	SA - SC/APC
1053 - 1053nm					SS - Specify	SU - SU/APC
1060 - 1060nm						LA - LC/APC
1064 - 1064nm						LU - LC/UPC
1080 - 1080nm						SS - Specify
SSSS - Specify						