

1040nm Fiber Mirror Reflector

1040nm Fiber Mirror Reflector is a fiber component which can reflect the input light with planar mirror built inside, the reflection light can be up to 80%. PM and Non-PM version are optional, It's widely used in Fiber Laser, Fiber Amplifier System and Fiber Optic Sensor. High power type is also available upon request.

Application:

Fiber Optic Amplifier
Fiber Optic Sensor
Fiber Laser
Lab And Research

Features:

High Extinction Ratio
High Power Available
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1040	nm
Bandwidth	BW	± 10	nm
Typ. Insertion Loss	IL	0.5	dB
Max. Insertion Loss	IL	0.7	dB
Min. Extinction Ratio (for PM fiber)	ER	20	dB
Max. PDL (for SM fiber)	PDL	0.15	dB
Max. Optical Power (CW)	P	500 or specify	mW
Max. Tensile Load		5	N
Fiber Type		PM Panda or SM fiber	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		$\Phi 5.5 \times L35$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, ER will be 2dB lower, slow axis is default aligned to the connector key.

Drawing:

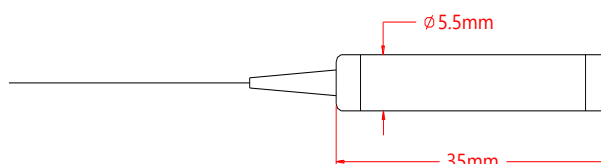

Ordering Information (Part Number):

FMR- WWW - FF - J - LL - CC				
WWW	FF	J	LL	CC
Wavelength	Fiber Type	Fiber Jacket	Fiber Length	Connector
1020 - 1020nm	PM - PM fiber	B - 250um Bare Fiber	05 - 0.5m	NE - None
1030 - 1030nm	SM - SM fiber	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1040 - 1040nm		2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
1050 - 1050nm		3 - 3.0mm Loose Tube	20 - 2.0m	SA - SC/APC
1053 - 1053nm			SS - Specify	SU - SU/APC
1060 - 1060nm				LA - LC/APC
1064 - 1064nm				LU - LC/UPC
1080 - 1080nm				SS - Specify
SSSS - Specify				SS - Specify