

1060nm High Power PM Tunable Optical Filter

1060nm High Power PM Tunable Optical Filter is a fiber passive component which can be used for filter out variable wavelength range from a wide wavelength bandwidth, it's based on thin film cavity filter technology, the demanded wavelength can be filtered out precisely by adjusting the manual screw. Wavelength can be tuned continuously over a wide spectral range up to 80nm, it's widely used in Optical Comb and Optical Testing System.

Application:

Optical Comb
Fiber Optic Sensor
ASE Control
Lab & Research

Features:

Low Insertion Loss
High Resolution
Wide Tuning Range
High Realibility



Specification:


Parameter	Symbol	Value	Unit
Center Wavelength	λ	1060	nm
Tuning Range		80	nm
Tuning Resolution		0.02 (min.), 0.1 (typ.)	nm
Insertion Loss	IL	4.0 (max.), 2.5 (typ.)	dB
Bandwidth @-3dB	BW	1.2 (max.), 1.0 (typ.)	nm
Typ. Bandwidth @-20dB	BW	10	nm
Extinction Ratio	ER	18 (min.), 20 (typ.)	dB
Min. Return Loss	RL	40	dB
Max. Optical Power (CW)	P	1, 3, 5, 10 or customized	W
Max. Tensile Load		5	N
Fiber Type		PM 980 Panda Fiber	-
Operating Temperature	T	0~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension			mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, ER will be 2dB lower, RL will be 5dB lower.

Slow axis is default aligned to the connector key. Connectors only 1W CW optical power guarantee.

Drawing:

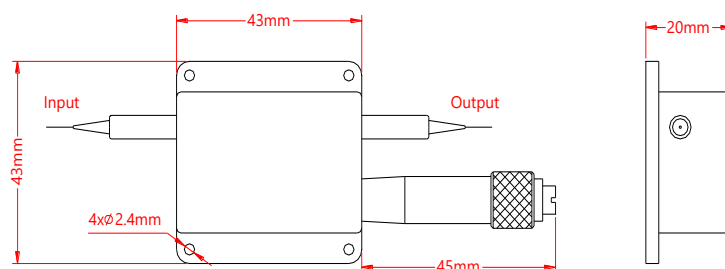

Ordering Information (Part Number):

HPMTOF-**WWWW**-**HH**-**J**-**LL**-**CC**

WWWW	HH	J	LL	CC
Wavelength	Handling Power	Fiber Jacket	Fiber Length	Connector
1060 - 1060nm SSSS - Specify	01 - 1W 03 - 3W 05 - 5W 10 - 10W SS - Specify	B - 250um Bare Fiber 9 - 900um Loose Tube	05 - 0.5m 08 - 0.8m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	NE - None FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify