

1064nm In Line Polarizer

1064nm In Line Polarizer is a fiber optic passive component which can be used for converting the non polarized light to a polarized light, it only allows the polarization light that paralleled to the polarizer to pass and block the other polarization, it also can be used to enhance extinction ratio of the polarization light. High power type is also available upon request.

Application:

Fiber Optic Amplifier
Fiber Optic Sensor
Fiber Laser
Lab And Research

Features:

High Extinction Ratio
High Power Available
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1064	nm
Bandwidth	BW	± 30	nm
Typ. Insertion Loss	IL	0.4	dB
Max. Insertion Loss	IL	0.6	dB
Typ. Extinction Ratio	ER	30	dB
Min. Extinction Ratio	ER	28	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	500	mW
Max. Tensile Load		5	N
Fiber Type		PM 980 Panda fiber or HI 1060 fiber	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		$\Phi 5.5 \times L35$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, ER will be 2dB lower, slow axis is default aligned to the connector key.

Drawing:

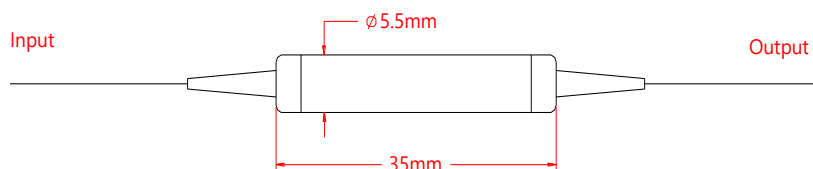

Ordering Information (Part Number):

ILP- WWW - FF - J - LL - CC				
WWW	FF	J	LL	CC
Wavelength	Fiber Type (Input/Output)	Fiber Jacket	Fiber Length	Connector
1020 - 1020nm	PP - PM fiber on input and output port	B - 250um Bare Fiber	05 - 0.5m	NE - None
1030 - 1030nm	SS - SM fiber on input and output port	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1040 - 1040nm	PS - PM fiber on input port	2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
1050 - 1050nm	SM fiber on output port	3 - 3.0mm Loose Tube	20 - 2.0m	SA - SC/APC
1053 - 1053nm	SP - SM fiber on input port		SS - Specify	SU - SU/APC
1060 - 1060nm	PM fiber on output port			LA - LC/APC
1064 - 1064nm				LU - LC/UPC
1080 - 1080nm				SS - Specify
SSSS - Specify				