

1064nm TGG Fiber Faraday Rotator

1064nm TGG Fiber Faraday Rotator is a fiber component which can change state of polarization (SOP), the output polarization light will rotate 45° or 90° when the input light passes faraday rotator, It's widely used in Fiber Laser, Fiber Amplifier System and Fiber Optic Sensor. High power type up to 20W is available upon request.

Application:

Fiber Optic Amplifier
Fiber Optic Sensor
Fiber Laser
Lab And Research

Features:

High Extinction Ratio
High Power Available
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value		Unit
Center Wavelength	λ	1064		nm
Bandwidth	BW	± 5		nm
Faraday Rotate Angle		45 ± 3	90 ± 3	Degree
Typ. Insertion Loss	IL	0.5	0.8	dB
Max. Insertion Loss	IL	0.8	1.2	dB
Min. Extinction Ratio (for PM fiber output)	ER	20		dB
Max. PDL (for SM fiber output)	PDL	0.1		dB
Min. Return Loss	RL	50		dB
Max. Optical Power (CW)	P	500 or specify		mW
Max. Tensile Load		5		N
Fiber Type		PM Panda fiber or SM fiber		-
Operating Temperature	T	$-5 \sim 70$		°C
Storage Temperature	T	$-40 \sim 85$		°C
Package Dimension				mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, ER will be 2dB lower, slow axis is default aligned to the connector key.

Drawing:

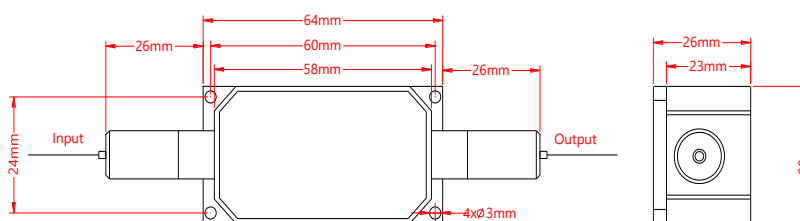

Ordering Information (Part Number):

TFR- WWW - A - FF - J - LL - CC					
WWW	A	FF	J	LL	CC
Wavelength	Rotate Angle	Fiber Type (Input/Output)	Fiber Jacket	Fiber Length	Connector
1020 - 1020nm	4 - 45°	PP - PM fiber on input and output port	B - 250um Bare Fiber	05 - 0.5m	NE - None
1030 - 1030nm	9 - 90°	SS - SM fiber on input and output port	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1040 - 1040nm		PS - PM fiber on input	2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
1050 - 1050nm		SM fiber on output	3 - 3.0mm Loose Tube	20 - 2.0m	SA - SC/APC
1053 - 1053nm		SP - SM fiber on input		SS - Specify	SU - SU/APC
1060 - 1060nm		PM fiber on output			LA - LC/APC
1064 - 1064nm					LU - LC/UPC
1080 - 1080nm					SS - Specify
SSSS - Specify					