

## 1310nm 2x2 Polarization Beam Combiner/Splitter


1310nm 2x2 Polarization Beam Combiner/Splitter is a fiber passive component which can combine the two polarized light into one output fiber or split the orthogonal polarization light to two output fiber, it's widely used in Quantum Communication and Fiber Optic Diffraction field, the high power type is available upon request.

### Application:

Quantum Communication  
Fiber Optic Sensor  
Laser System  
Fiber Optic Diffraction

### Features:

High Extinction Ratio  
Low Insertion Loss  
Optical Path Reversibility  
High Reliability




### Specification:

| Parameter                       | Symbol                                                 | Value                           | Unit               |
|---------------------------------|--------------------------------------------------------|---------------------------------|--------------------|
| Center Wavelength               | $\lambda$                                              | 1310                            | nm                 |
| Bandwidth                       | BW                                                     | $\pm 20$                        | nm                 |
| Insertion Loss                  | Port 3 to 1&2 @ slow axis<br>Port 4 to 1&2 @ fast axis | IL                              | Max. 0.8, Typ. 0.6 |
| Min. Extinction Ratio (For PBS) | ER                                                     | 18                              | dB                 |
| Min. Directivity                |                                                        | 50                              | dB                 |
| Min. Return Loss                | RL                                                     | 50                              | dB                 |
| Max. Optical Power (CW)         | P                                                      | 500 or specify                  | mW                 |
| Max. Tensile Load               |                                                        | 5                               | N                  |
| Fiber Type                      | For Port 1 and Port 2                                  | PM Panda fiber                  | -                  |
|                                 | For Port 3 and Port 4                                  | PM Panda fiber or SMF-28e fiber | -                  |
| Operating Temperature           | T                                                      | -5~70                           | °C                 |
| Storage Temperature             | T                                                      | -40~85                          | °C                 |
| Package Dimension               |                                                        |                                 | mm                 |

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, ER will be 2dB lower, slow axis is default aligned to the connector key.

### Drawing:

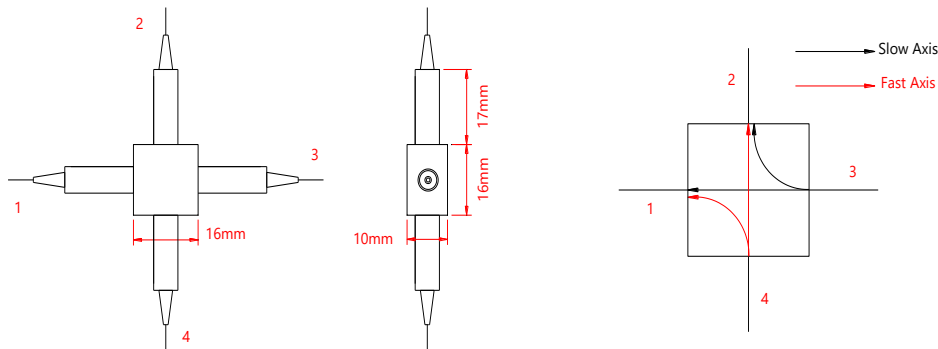

### Ordering Information (Part Number):

| WWWW                            | FF                                                                                                                                                               | J                                            | LL                                                               | CC                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Wavelength                      | Fiber Type on Port 3 and Port 4                                                                                                                                  | Fiber Jacket                                 | Fiber Length                                                     | Connector                                                                                                           |
| 1310 - 1310nm<br>SSSS - Specify | S2 - SMF-28e Fiber<br>PM - PM Panda Fiber,<br>Slow Axis Aligned to Port 1 and 2<br>P4 - PM Panda Fiber,<br>Slow Axis 45° Aligned to Port 1 and 2<br>SS - Specify | B - 250um Bare Fiber<br>9 - 900um Loose Tube | 05 - 0.5m<br>10 - 1.0m<br>15 - 1.5m<br>20 - 2.0m<br>SS - Specify | NE - None<br>FA - FC/APC<br>FU - FC/UPC<br>SA - SC/APC<br>SU - SU/APC<br>LA - LC/APC<br>LU - LC/UPC<br>SS - Specify |