

1310nm High Power Multimode Fiber Optic Isolator

1310nm High Power Multimode Fiber Optic Isolator is a fiber passive component built with multimode fiber, it allows light signal to be delivered in one forward direction and avoid the back reflection light, it's widely used in amplifier system, fiber optic sensor system to protect the light source and lower down the optical signal noise. If need pulse type please contact us to confirm.

Application:

Fiber Amplifier
Fiber Optic Sensor
Fiber Laser
Lab & Research

Features:

High Isolation
High Power
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value		Unit
Center Wavelength	λ	1310		nm
Bandwidth	BW	± 15		nm
Stage		Single Stage	Dual Stage	-
Typ. Insertion Loss	IL	0.5	0.6	dB
Max. Insertion Loss	IL	0.8	0.9	dB
Typ. Peak Isolation	Iso	35	50	dB
Min. Isolation	Iso	25	40	dB
Min. Return Loss	RL	35		dB
Max. Optical Power (CW)	P	1, 3, 5, 10 or customized		W
Max. Peak Power	P	5, 10 or customized		kW
Max. Tensile Load		5		N
Fiber Type		50/125 or 62.5/125 MM fiber		-
Operating Temperature	T	-5~70		°C
Storage Temperature	T	-40~85		°C
Package Dimension		$\Phi 5.5 \times L35$		mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 °C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, connectors only 1W CW guarantee.

Drawing:

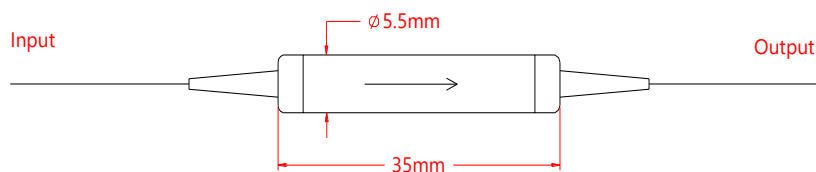

Ordering Information (Part Number):

HMMISO- WWW - S - HH - FF - J - LL - CC						
WWW	S	HH	FF	J	LL	CC
Wavelength	Stage	Handling Power	Fiber Type	Fiber Jacket	Fiber Length	Connector
1310 - 1310nm	S - Single Stage	01 - 1W	M5 - 50/125 MM fiber	B - 250um Bare Fiber	05 - 0.5m	NE - None
1450 - 1450nm	D - Dual Stage	03 - 3W	M6 - 62.5/125 MM fiber	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1480 - 1480nm		05 - 5W	M1 - 105/125 MM fiber	2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
1550 - 1550nm		10 - 10W	SS - Specify	3 - 3.0mm Loose Tube	20 - 2.0m	SA - SC/APC
1580 - 1580nm		SS - Specify			SS - Specify	SU - SU/APC
SSSS - Specify						LA - LC/APC
						LU - LC/UPC
						SS - Specify