

1310nm High Power SM Fiber Patchcord

1310nm High Power SM Fiber Patchcord is built with SM fiber, it's widely used in Fiber Communication, Fiber Optic Sensor, Optical Testing System, the termination connector can be FC, SC, LC, ST, the jacket diameter can be 0.9, 2.0, 3.0mm or armoured type. The Handling Power can be up to 10W CW.

Application:

Fiber Communication
Fiber Optic Sensor
Testing System
Lab And Research

Features:

Low Insertion Loss
High Return Loss
High Quality Ferrule
High Reliability




Optical Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1310	nm
Typ. Insertion Loss	IL	0.3	dB
Max. Insertion Loss	IL	0.5	dB
Min. Return Loss	RL	50 for UPC, 60 for APC	dB
Fiber Type		SMF-28e fiber	-
Tensile Load		5	N
Max. Optical Power (CW)	P	1, 3, 5, 10 or customized	W
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C

Notice: Above specifications are tested at center wavelength in room temperature @23°C.

Drawing:

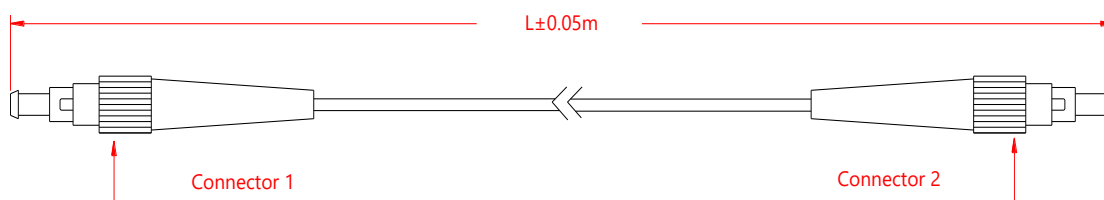

Ordering Information (Part Number):

HSMFP-**WWW**-**HH**-**J**-**LL**-**CC**-**CC**

WWW	HH	J	LL	CC	CC
Wavelength	Handling Power	Fiber Jacket	Fiber Length	Connector 1	Connector 2
1300 - 1300nm	01 - 1W	B - Bare Fiber	05 - 0.5m	FA - FC/APC	NE - None
1310 - 1310nm	02 - 2W	9 - 900um Loose Tube	10 - 1.0m	FU - FC/UPC	FA - FC/APC
1350 - 1350nm	03 - 3W	2 - 2.0mm Loose Tube	15 - 1.5m	SA - SC/APC	FU - FC/UPC
1360 - 1360nm	05 - 5W	3 - 3.0mm Loose Tube	20 - 2.0m	SU - SC/UPC	SA - SC/APC
1370 - 1370nm	10 - 10W	A - Armoured Cable	30 - 3.0m	LA - LC/APC	SU - SC/UPC
1380 - 1380nm	SS - Specify		SS - Specify	LU - LC/UPC	LA - LC/APC
SSSS - Specify				SS - Specify	LU - LC/UPC
					SS - Specify