

1310nm High Power SM Tunable Optical Filter

1310nm High Power SM Tunable Optical Filter is a fiber passive component which can be used to filter out a variable wavelength range from a wide wavelength bandwidth. It's based on thin film cavity filter technology; the demanded wavelength can be filtered out precisely by adjusting the manual screw. Wavelength can be tuned continuously over a wide spectral range up to 80nm; it's widely used in Fiber Optic Sensor and Optical Testing System.

Application:

Optical Comb
Fiber Optic Sensor
ASE Control
Lab & Research

Features:

Low Insertion Loss
High Resolution
Wide Tuning Range
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1310	nm
Tuning Range		80	nm
Tuning Resolution		0.02 (min.), 0.1 (typ.)	nm
Insertion Loss	IL	4.0 (max.), 2.5 (typ.)	dB
Bandwidth @-3dB	BW	1.2 (max.), 1.0 (typ.)	nm
Typ. Bandwidth @-20dB	BW	10	nm
Polarization Dependent Loss	PDL	0.35 (max.), 0.15 (typ.)	dB
Polarization Mode Dispersion	PMD	0.5 (max.), 0.3 (typ.)	ps
Min. Return Loss	RL	40	dB
Max. Optical Power (CW)	P	1, 3, 5, 10	W
Max. Tensile Load		5	N
Fiber Type		SMF-28e fiber	-
Operating Temperature	T	0~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension			mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. Connectors only 1W CW guarantee.

Drawing:

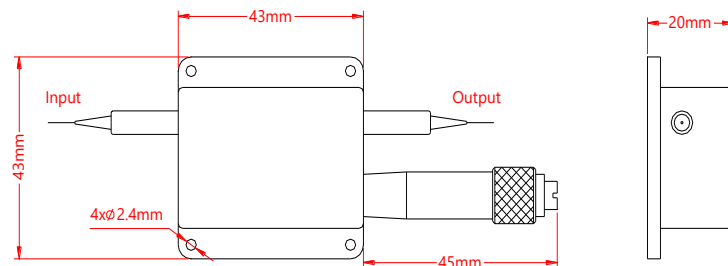

Ordering Information (Part Number):

HSMTOF- WWW - HH - J - LL - CC				
WWW	HH	J	LL	CC
Wavelength	Handling Power	Fiber Jacket	Fiber Length	Connector
1310 - 1310nm SSSS - Specify	01 - 1W 03 - 3W 05 - 5W 10 - 10W SS - Specify	B - 250um Bare Fiber 9 - 900um Loose Tube	05 - 0.5m 08 - 0.8m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	NE - None FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify