

1430nm High Power Polarization Insensitive Optical Isolator

1430nm High Power Polarization Insensitive Optical Isolator is a fiber passive component built with singlemode fiber, it allows light signal to be delivered in one forward direction and avoid the back reflection light, it's widely used in amplifier system, fiber optic sensor system to protect the light source and lower down the optical signal noise. The optical power can be up to 20W CW upon request, if need pulse type please contact us to confirm.

Application:

Fiber Amplifier
Fiber Optic Sensor
Fiber Laser
Lab & Research

Features:

High Power
High Isolation
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value		Unit
Center Wavelength	λ	1430		nm
Bandwidth	BW	± 15		nm
Stage		Single Stage	Dual Stage	-
Typ. Insertion Loss	IL	0.3	0.4	dB
Max. Insertion Loss	IL	0.5	0.6	dB
Typ. Peak Isolation	Iso	42	58	dB
Min. Isolation	Iso	28	48	dB
Max. Polarization Dependent Loss	PDL	0.15		dB
Max. Polarization Mode Dispersion	PMD	0.2		ps
Min. Return Loss	RL	50		dB
Max. Optical Power (CW)	P	1, 3, 5, 10, 15, 20 or specify		W
Max. Peak Power	P	5, 10 or specify		KW
Max. Tensile Load		5		N
Fiber Type		SMF-28e fiber		-
Operating Temperature	T	-5~70		°C
Storage Temperature	T	-40~85		°C
Package Dimension		$\Phi 5.5 \times L35$ or $L58 \times W10 \times H8$		mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 °C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. connectors only 1W CW optical power guarantee.

Drawing:

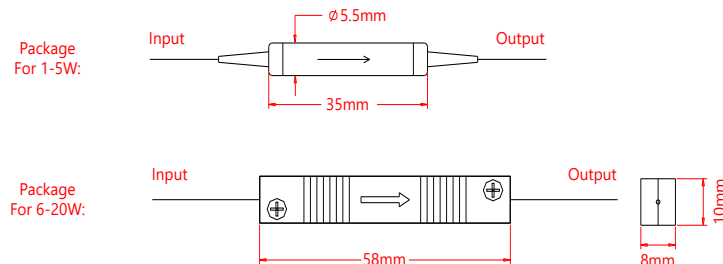

Ordering Information (Part Number):

HPIISO-**WWW**-**S**-**HH**-**J**-**LL**-**CC**

WWW	S	HH	J	LL	CC
Wavelength	Stage	Handling Power	Fiber Jacket	Fiber Length	Connector
1400 - 1400nm	S - Single Stage	01 - 1W	B - 250um Bare Fiber	05 - 0.5m	NE - None
1420 - 1420nm	D - Dual Stage	03 - 3W	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1430 - 1430nm		05 - 5W	2 - 2mm Loose Tube	15 - 1.5m	FU - FC/UPC
1450 - 1450nm		10 - 10W	3 - 3mm Loose Tube	20 - 2.0m	SA - SC/APC
1480 - 1480nm		15 - 15W		SS - Specify	SU - SU/APC
SSSS - Specify		20 - 20W			LA - LC/APC
		SS - Specify			LU - LC/UPC
					SS - Specify