

1510nm 3-port Polarization Insensitive Optical Circulator

1510nm 3-port Polarization Insensitive Optical Circulator is a fiber passive component built with faraday crystal, which can change signal light transmission path, the signal can be delivered from Port 1 to Port 2, the other signal light from Port 2 to Port 3, the high isolation can block the back reflection light. It's widely used in WDM System, Fiber Optic Sensor and Coherent Detecting field. High Power type is available upon request.

Application:

Fiber Optic Sensor
CWDM, DWDM System
Coherent Detecting
Fiber Optic Amplifier

Features:

Low PDL
High Isolation
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1510	nm
Bandwidth	BW	± 30	nm
Typ. Insertion Loss (Port 1 to 2, 2 to 3)	IL	0.6	dB
Max. Insertion Loss (Port 1 to 2, 2 to 3)	IL	0.8	dB
Typ. Isolation (Port 2 to 1, 3 to 2)	Iso	50	dB
Min. Isolation (Port 2 to 1, 3 to 2)	Iso	40	dB
Max. Polarization Dependent Loss	PDL	0.15	dB
Max. Polarization Mode Dispersion	PMD	0.1	ps
Min. Cross Talk	Ct	50	dB
Min. Directivity		50	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	500	mW
Max. Tensile Load		5	N
Fiber Type		SMF-28e fiber	-
Operating Temperature	T	0~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		$\Phi 5.5 \times L50$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower.

Drawing:

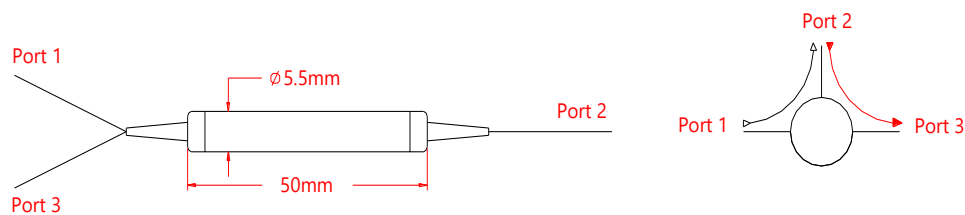

Ordering Information (Part Number):

PICIR- WWW-P-J-LL-CC				
WWW	P	J	LL	CC
Wavelength	Port	Fiber Jacket	Fiber Length	Connector
1510 - 1510nm	3 - 3 Ports	B - 250um Bare Fiber	05 - 0.5m	NE - None
1530 - 1530nm		9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1550 - 1550nm		2 - 2mm Loose Tube	15 - 1.5m	FU - FC/UPC
1560 - 1560nm		3 - 3mm Loose Tube	20 - 2.0m	SA - SC/APC
1570 - 1570nm			SS - Specify	SU - SU/APC
1580 - 1580nm				LA - LC/APC
SSSS - Specify				LU - LC/UPC
				SS - Specify