

1550nm PM Cladding Power Stripper

1550nm PM Cladding Power Stripper is a fiber component used to strip the pump laser which is not absorbed completely after doped fiber or the reflection pump laser. It's widely used in fiber amplifier and fiber laser field, the handling power can be up to 500W or specify, the DC fiber can be customized upon request.

Application:

Fiber Laser
Fiber Amplifier
Quantum Optics
Lab And Research

Features:

Low Insertion Loss
High Power
RoHs Compliant
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Signal Wavelength	λ	1510-1590	nm
Operating Pump Wavelength	λ	780-1000	nm
Input and Output Fiber		PM-GDF-1550, 12/130, 25/300 PM DCF	-
Cladding Pump Power Attenuation	Att.	18-20	dB
Max. Insertion Loss	IL	0.2	dB
Min. Extinction Ratio	ER	18	dB
Max. Cladding Pump Optical Power (CW)	P	10, 20, 30, 50, 100, 200 or specify	W
Operating Humidity		5-95	%RH
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		70x12x8	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

Cladding Power Strippers are default without connector, bare fiber, if special request please contact us to confirm.

Drawing:

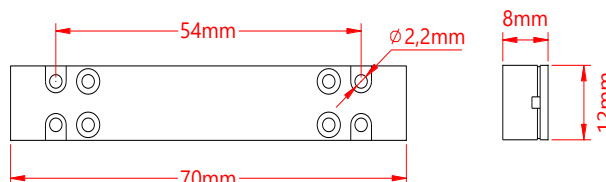

Ordering Information (Part Number):

PMGPS- WWW - HH - FFF / FFF - LL			
WWW	HH	FFF/FFF	LL
Signal Wavelength	Handling Cladding Pump Power	PM Fiber Type	Fiber Length
1530 - 1530nm	10 - 10W	PG15 - PM-GDF-1550	05 - 0.5m
1550 - 1550nm	20 - 20W	12/130 - 12/130um	08 - 0.8m
1560 - 1560nm	30 - 30W	25/300 - 25/300um	10 - 1.0m
1570 - 1570nm	50 - 50W	SS/SSS - Specify	15 - 1.5m
1580 - 1580nm	100 - 100W		20 - 2.0m
SSSS - Specify	200 - 200W		SS - Specify
	500 - 500W		
	SS - Specify		