

1720nm High Power Polarization Insensitive Optical Isolator

1720nm High Power Polarization Insensitive Optical Isolator is a fiber passive component built with singlemode fiber, it allows light signal to be delivered in one forward direction and avoid the back reflection light, it's widely used in amplifier system, fiber optic sensor system to protect the light source and lower down the optical signal noise. The optical power can be up to 10W CW upon request, if need pulse type please contact us to confirm.

Application:

Fiber Amplifier
Fiber Optic Sensor
Fiber Laser
Lab & Research

Features:

High Power
High Isolation
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	1720	nm
Bandwidth	BW	± 10	nm
Typ. Insertion Loss	IL	0.8	dB
Max. Insertion Loss	IL	1.2	dB
Typ. Peak Isolation	Iso	35	dB
Min. Isolation	Iso	32	dB
Max. Polarization Dependent Loss	PDL	0.2	dB
Max. Polarization Mode Dispersion	PMD	0.2	ps
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	1, 3, 5, 10 or specify	W
Max. Peak Power	P	5, 10 or specify	KW
Max. Tensile Load		5	N
Fiber Type		SMF-28e fiber or specify	-
Operating Temperature	T	-5~70	°C
Storage Temperature	T	-40~85	°C
Package Dimension		$\Phi 5.5 \times L38$	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. connectors only 1W CW optical power guarantee.

Drawing:

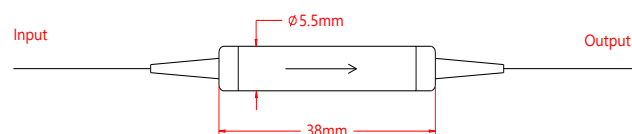

Ordering Information (Part Number):

HPIISO-**WWW**-**HH**-**J**-**LL**-**CC**

WWW	HH	J	LL	CC
Wavelength	Handling Power	Fiber Jacket	Fiber Length	Connector
1700 - 1700nm	01 - 1W	B - 250um Bare Fiber	05 - 0.5m	NE - None
1720 - 1720nm	03 - 3W	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1750 - 1750nm	05 - 5W	2 - 2mm Loose Tube	15 - 1.5m	FU - FC/UPC
1760 - 1760nm	10 - 10W	3 - 3mm Loose Tube	20 - 2.0m	SA - SC/APC
1780 - 1780nm	SS - Specify		SS - Specify	SU - SU/APC
SSSS - Specify				LA - LC/APC
				LU - LC/UPC
				SS - Specify