

2050nm High Power PM Fiber Optic Isolator

2050nm High Power PM Fiber Optic Isolator is a fiber passive component built with PM fiber, it allows light signal to be delivered in one forward direction and avoid the back reflection light, it's widely used in amplifier system, fiber optic sensor system to protect the light source and lower down the optical signal noise. The optical power can be up to 20W CW upon request, if need pulse type please contact us to confirm.

Application:

Fiber Optic Amplifier
Fiber Optic Sensor
Fiber Laser
Lab & Research

Features:

High Power
High Isolation
Low Insertion Loss
High Reliability



Specification:


Parameter	Symbol	Value		Unit
Center Wavelength	λ	2050		nm
Bandwidth	BW	± 20		nm
Stage		Single Stage	Dual Stage	-
Typ. Insertion Loss	IL	1.0	1.2	dB
Max. Insertion Loss	IL	1.2	1.5	dB
Typ. Peak Isolation	Iso	22	42	dB
Min. Isolation	Iso	20	35	dB
Min. Extinction Ratio for Fast Axis Blocked	ER	22		dB
Min. Extinction Ratio for Both Axes Working	ER	20		dB
Min. Return Loss	RL	50		dB
Max. Optical Power (CW)	P	1, 3, 5, 10, 15, 20 or specify		W
Max. Peak Power	P	5, 10 or specify		KW
Max. Tensile Load		5		N
Fiber Type		PM 1550, PM 1950, PM10/130 DC Fiber		-
Operating Temperature	T	-5~70		°C
Storage Temperature	T	-40~85		°C
Package Dimension		$\Phi 5.5 \times L35$ or $L58 \times W10 \times H8$		mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. ER will be 2dB lower.

Slow axis is default aligned to the connector key. Connectors only 1W CW optical power guarantee.

Drawing:

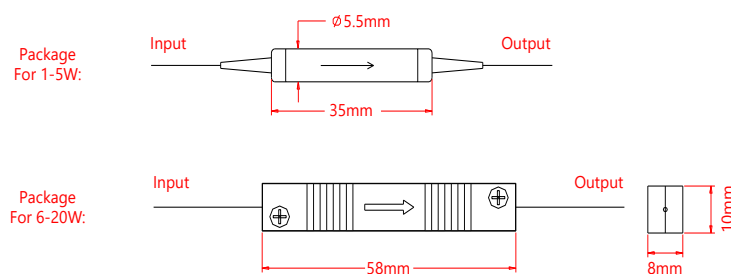

Ordering Information (Part Number):

HPMISO-**WWW-S-A-HH-J-LL-CC**

WWW	S	A	HH	J	LL	CC
Wavelength	Stage	Working Axis	Handling Power	Fiber Jacket	Fiber Length	Connector
1900 - 1900nm	S - Single Stage	F - Fast axis Blocked	01 - 1W	B - 250um Bare Fiber	05 - 0.5m	NE - None
1940 - 1940nm	D - Dual Stage	Slow Axis working	03 - 3W	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
1950 - 1950nm		B - Both Axes Working	05 - 5W	2 - 2.0mm Loose Tube	15 - 1.5m	FU - FC/UPC
2000 - 2000nm			10 - 10W	3 - 3.0mm Loose Tube	20 - 2.0m	SA - SC/APC
2050 - 2050nm			15 - 15W		SS - Specify	SU - SU/APC
SSSS - Specify			20 - 20W			LA - LC/APC
			SS - Specify			LU - LC/UPC
						SS - Specify