

633nm High Power Multimode Fiber Optic Isolator

633nm High Power Multimode Fiber Optic Isolator is a fiber passive component built with TGG crystal, it allows light signal to be delivered in one forward direction and avoid the back reflection light, it's widely used in Quantum Communication, Fiber Optic Sensor system to protect the light source and lower down the system optical signal noise. If need pulse type please contact us to confirm.

Application:

Quantum Communication
Fiber Optic Sensor
Fiber Laser
Lab & Research

Features:

High Isolation
High Power
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	633	nm
Bandwidth	BW	± 5	nm
Typ. Insertion Loss	IL	1.5	dB
Max. Insertion Loss	IL	1.8	dB
Typ. Peak Isolation	Iso	25	dB
Min. Isolation	Iso	22	dB
Min. Return Loss	RL	35	dB
Max. Optical Power (CW)	P	1, 2, 3, 5 or customized	W
Max. Peak Power	P	5, 10 or customized	kW
Max. Tensile Load		5	N
Fiber Type		50/125, 62.5/125, 105/125 MM fiber	-
Operating Temperature	T	+5~60	°C
Storage Temperature	T	-20~75	°C
Package Dimension			mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23 °C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. Connectors only 1W CW guarantee.

Drawing:

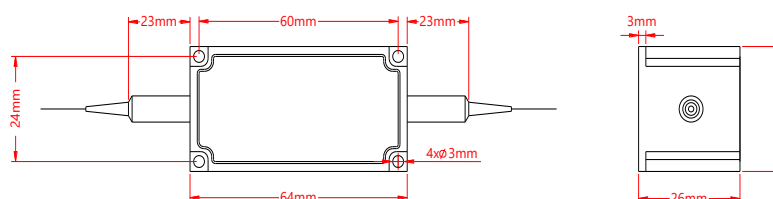

Ordering Information (Part Number):

HMMISO- WWW - HH - FF - J - LL - CC					
WWW	HH	FF	J	LL	CC
Wavelength	Handling Power	Fiber Type	Fiber Jacket	Fiber Length	Connector
633 - 633nm	01 - 1W	M5 - 50/125um	B - 250um Bare Fiber	05 - 0.5m	NE - None
635 - 635nm	03 - 3W	M6 - 62.5/125um	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
637 - 637nm	05 - 5W	M1 - 105/125um	2 - 2mm Loose Tube	15 - 1.5m	FU - FC/UPC
640 - 640nm	SS - Specify	SS - Specify	3 - 3mm Loose Tube	20 - 2.0m	SA - SC/APC
650 - 650nm				SS - Specify	SU - SU/APC
670 - 670nm					LA - LC/APC
680 - 680nm					LU - LC/UPC
SSS - Specify					SS - Specify