

650/2000nm 1x2 PM Fused WDM

650/2000nm 1x2 PM Fused WDM (Wavelength Division Multiplexer) is a fiber component built with FBT technology, it can be used to separate or combine 650nm and 2000nm wavelength signal with PM Panda fiber, it's widely used in Fiber Laser Systems and Optical Testing Systems, the high power type is available upon request.

Application:

Fiber Laser
Testing System
Optical Diffraction System
Lab And Research

Features:

Epoxy Free
High Isolation
Low Insertion Loss
Optical Path Reversibility




Specification:

Parameter	Symbol	Value	Unit
Wavelength	λ	650/2000	nm
Bandwidth	BW	650 $\pm$ 10/2000 $\pm$ 10	nm
Max. Insertion Loss	IL	1.5	dB
Min. Isolation (for Wavelength separate)	Iso	10	dB
Min. Extinction Ratio	ER	18	dB
Min. Directivity		50	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	500	mW
Max. Tensile Load		5	N
Fiber Type		PM 1550 or PM 1950 Panda Fiber	-
Operating Temperature	T	-5~75	°C
Storage Temperature	T	-40~85	°C
Package Dimension		Φ3.0×L54	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, ER will be 2dB lower, slow axis is default aligned to the connector key.

Drawing:

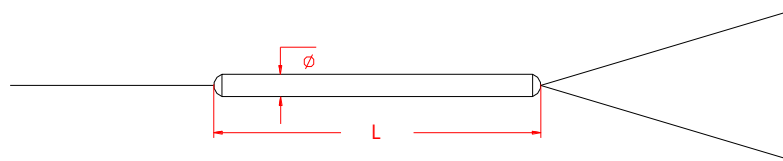

Ordering Information (Part Number):

PFUW- WWW/WWW - FF - J - LL - CC				
WWW/WWW	FF	J	LL	CC
Wavelength	Fiber Type	Fiber Jacket	Fiber Length	Connector
650/1940 - 650/1940nm	P1 - PM 1950 Fiber	B - 250um Bare Fiber	05 - 0.5m	NE - None
650/1950 - 650/1950nm	P5 - PM 1550 Fiber	9 - 900um Loose Tube	10 - 1.0m	FA - FC/APC
650/2000 - 650/2000nm	SS - Specify		15 - 1.5m	FU - FC/UPC
650/2050 - 650/2050nm			20 - 2.0m	SA - SC/APC
650/2100 - 650/2100nm			SS - Specify	SU - SU/APC
				LA - LC/APC
				LU - LC/UPC
				SS - Specify