

950nm Polarization Insensitive Optical Isolator

950nm Polarization Insensitive Optical Isolator is a fiber passive component built with TGG crystal, it allows light signal to be delivered in one forward direction and avoid the back reflection light, it's widely used in Fiber Amplifier, fiber optic sensor system to protect the light source and lower down the system optical signal noise. The high power type is available upon request.

Application:

Fiber Amplifier
Fiber Optic Sensor
Fiber Laser
Lab & Research

Features:

High Isolation
Low PDL
Low Insertion Loss
High Reliability




Specification:

Parameter	Symbol	Value	Unit
Center Wavelength	λ	950	nm
Bandwidth	BW	± 5	nm
Typ. Insertion Loss	IL	0.8	dB
Max. Insertion Loss	IL	1.0	dB
Typ. Peak Isolation	Iso	32	dB
Min. Isolation	Iso	25	dB
Max. Polarization Dependent Loss	PDL	0.15	dB
Min. Return Loss	RL	45	dB
Max. Optical Power (CW)	P	500 or customized	mW
Max. Tensile Load		5	N
Fiber Type		HI 1060 fiber	-
Operating Temperature	T	+10~50	°C
Storage Temperature	T	0~60	°C
Package Dimension		64x28x26	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower.

Drawing:

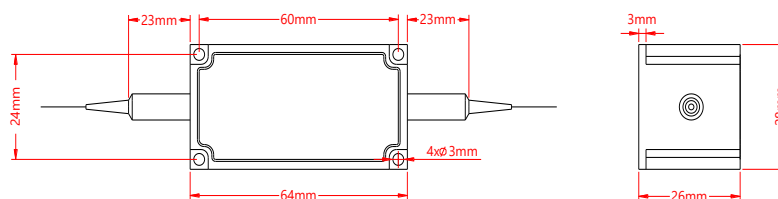

Ordering Information (Part Number):

PIISO- WWW - HH - J - LL - CC				
WWW	HH	J	LL	CC
Wavelength	Handling Power	Fiber Jacket	Fiber Length	Connector
905 - 905nm 915 - 915nm 920 - 920nm 930 - 930nm 940 - 940nm 950 - 950nm 975 - 975nm 980 - 980nm SSS - Specify	Z5 - 0.5W SS - Specify	B - 250um Bare Fiber 9 - 900um Loose Tube	05 - 0.5m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	NE - None FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify