

808/1310nm 1x2 PM Fused WDM

808/1310nm 1x2 PM Fused WDM (Wavelength Division Multiplexer) is a fiber component built with FBT technology, it can be used to separate or combine 808nm and 1310nm wavelength signal with PM Panda fiber, it's widely used in Fiber Laser Systems and Optical Testing Systems, the high power type is available upon request.

Application:

Fiber Laser
Testing System
Optical Diffraction System
Lab And Research

Features:

Epoxy Free
High Isolation
Low Insertion Loss
Optical Path Reversibility




Specification:

Parameter	Symbol	Value	Unit
Wavelength	λ	808/1310	nm
Bandwidth	BW	808±5/1310±5	nm
Max. Insertion Loss	IL	1.0	dB
Min. Isolation (for wavelength separate)	Iso	18	dB
Min. Extinction Ratio	ER	18	dB
Min. Directivity		50	dB
Min. Return Loss	RL	50	dB
Max. Optical Power (CW)	P	500	mW
Max. Tensile Load		5	N
Fiber Type		PM 1310 Panda Fiber	-
Operating Temperature	T	-5~75	°C
Storage Temperature	T	-40~85	°C
Package Dimension		Φ3.0×L54	mm

Notice: Above specifications are tested at center wavelength without connector in room temperature @23°C.

For devices with connectors, IL will be 0.3dB higher, ER will be 2dB lower, slow axis is default aligned to the connector key.

Drawing:

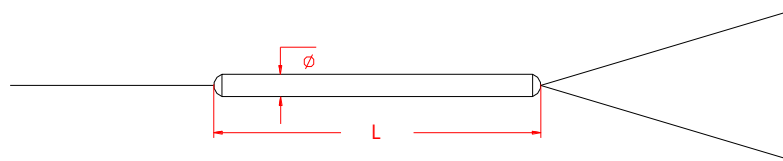

Ordering Information (Part Number):

PFUW- WWW/WWW -FF-J-LL-CC				
WWW/WWW	FF	J	LL	CC
Wavelength	Fiber Type	Fiber Jacket	Fiber Length	Connector
808/1310 - 808/1310nm	P3 - PM 1310 Fiber SS - Specify	B - 250um Bare Fiber 9 - 900um Loose Tube	05 - 0.5m 10 - 1.0m 15 - 1.5m 20 - 2.0m SS - Specify	NE - None FA - FC/APC FU - FC/UPC SA - SC/APC SU - SU/APC LA - LC/APC LU - LC/UPC SS - Specify